


E/A-Modul

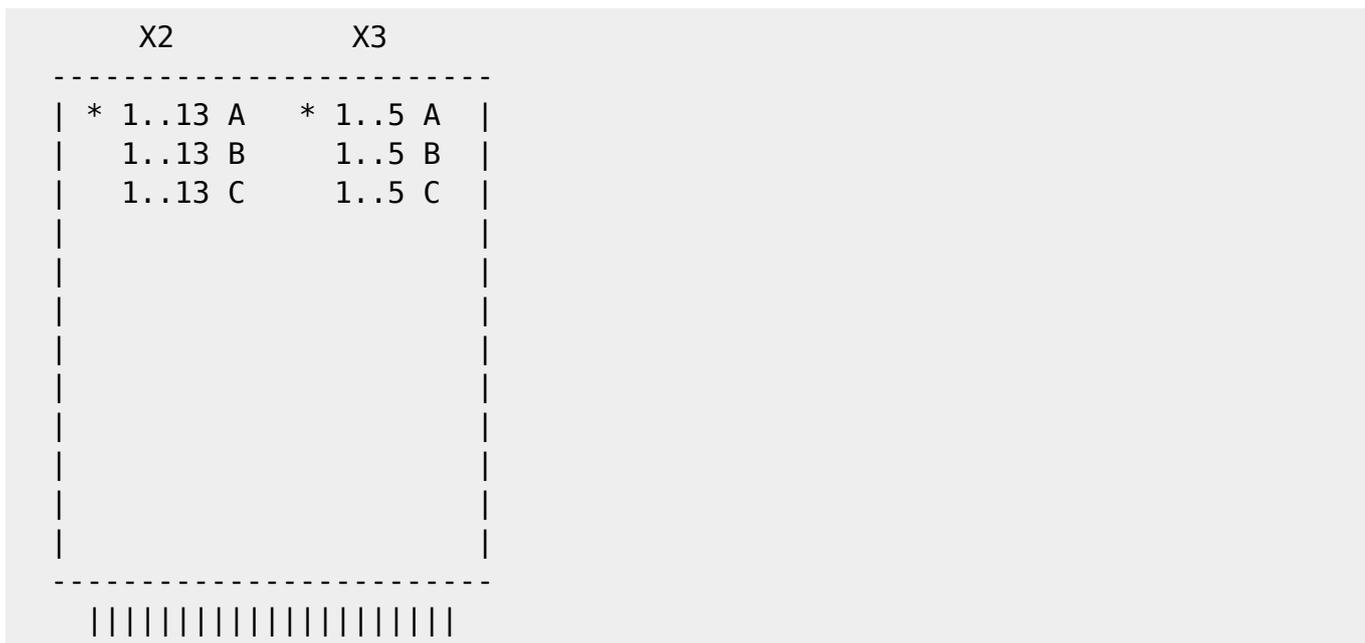

PIO Port dez.

A1AD	30H	48
A1AS	31H	49
A1BD	32H	50
A1BS	33H	51
A2AD	34H	52
A2AS	35H	53
A2BD	36H	54
A2BS	37H	55

X2: PIO-E/A

X2	1	2	3	4	5	11	12	13	Port	
A	0V	ARDY	STB	0	1	..	7	-	+5V	A2B
B	0V	ARDY	STB	0	1	..	7	-	+5V	A1A
C	0V	ARDY	STB	0	1	..	7	-	+5V	A1B

X3: V24

X3	1	2	3	4	5
A	0V	RxD	DSR	RTS>	+5V
B	0V	CTS	P0	TxD>	+5V

Demo-LEDs

0V 0 0 0 0 0 0 0 0 +5V

Port	1B	1A	1C
Bit	0 1 2	3 4	5 6 7

X2 C4..C6 B7..B8 C9..C11
270 Ohm an LED
Anoden der LEDs alle an +5V

BASIC:

out 51,15: out 49,15: out 55,15

Brosig-Monitor:

#O 33 0F
#O 31 0F
#O 37 0F

From:
<https://hc-ddr.hucki.net/wiki/> - Homecomputer DDR

Permanent link:
https://hc-ddr.hucki.net/wiki/doku.php/z1013/module/e_a_modul?rev=1321792916

Last update: **2011/11/20 12:41**

